


DBME Mobile Jaw Crusher

Capacity:10-800t/h Max. Input Size: 950mm



Craftsmanship Shape the reputation of trust

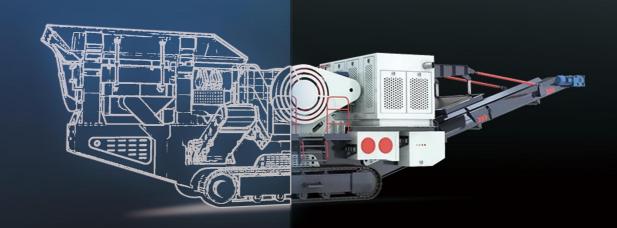

Features

Optional Models for Specific Conditions

Dingbo Mobile Crusher consists of various models. According to projects' conditions, Mobile Crusher can be used independently or combined with other plants.

Flexible and Fast Transition

With powerful driving force, Mobile Crusher can climb or work under severe conditions. It's especially suitable for highway and railway construction. Higher Production Efficiency

With the fully hydraulic system control, Mobile Crusher is more flexible and controllable and the production efficiency is higher.

Lower Investment Costs

Usually, investors can get their expenses back for around 6 months for Mobile Crusher doesn't need foundation station, and the investment is totally controllable.

Designed and manufactured with more professional mobile crushing technology, Dingbo Mobile Jaw Crusher can meet the customers' requirement of high mobility, high crushing efficiency and optimizes your business mode.





Application

Minerals and Hard Rock Crushing, Aggregates Processing, Construction Waste Recycling, Slag Processing, Tunnel Crushing, Cement Industry

Material

River pebbles, rocks (limestone, granite, basalt, diabase, andesite, etc.)









Technical Parameters

Model	Vibrating Feeder	Jaw Crusher	Belt Conveyor	Capacity (t/h)	Powder (kw)
YD938E69	ZSW-380×96	PE600×900	B650×7M	70-150	91.5
YD1142E710	ZSW-420×110	PE750×1060	B800×9M	80-200	134
YD1349E912	ZSW-490×130	PE900×1200	B1000×11M	150-300	146

Notice: 1.The processing capacity of the crusher is related to the hardness of the stone, feed particle size, and discharge particle size.

- 2. Standard configuration: tailings belt, manual control, wireless remote control.
- 3. Optional: Return system, side conveyor folding, iron remover, dust removal spray system, belt cover.
- 4. Considering that our company's technology is constantly updated and the technical parameters are subject to change without prior notice, the specific parameters are subject to the actual product.

Notice: Any change of technical data shall not be advised additionally.

